 **Supplies for ready-made clothing industries / other industries**



Marking tapes and ink ribbons

A perfect printing result, appropriate resistance and best washing results – this is what the appropriate printing system provides in perfect combination with the ink ribbon and marking tape. Especially in ready-made clothing industries there are high standards on the labels. We have the right solution for you or work out the customized solutions with you!



Polyester-satin tape (PS)

Polyester-satin tapes are used particularly for producing washing resistant care labels and are suitable for sewing in subsequently. They are supplied in various qualities. Choose from our wide range of white and coloured polyester-satin tapes.

- ✓ roll length: 100 m / 200 m
- ✓ standard widths: 25, 30, 35, 40 and 50 mm, others on demand

Application area: ready-made clothing



Quality	Material	Colour
PS05	standard, very soft	white and black
PS06	reinforced	white and black
PS08	with selvedge, for printing on both sides	black
PS11	for printing on both sides	white
PS12	single-coloured tapes, for printing on one side	24 different colours available*

*e. g. yellow, pale blue, grey, golden, creamy, green, champagne, orange, purple, red, cherry, pink, peach, ivory



Nylon-taffeta tape (NT)

Nylon-taffeta tapes are used particularly for producing washing resistant care labels and are suitable for sewing in subsequently.

- ✓ roll length: 200 m
- ✓ standard widths: 25, 30, 35, 40 and 50 mm, others on demand

Application area: ready-made clothing



Quality	Material	Colour*
NT01	smooth surface	white
NT02	coarse surface	white
NT08	very smooth surface	white
NT11	very smooth surface	white

*NT-tapes are also available in colour. Ask for an individual offer!




Polyester-taffeta tape (PT)

Polyester-taffeta tapes are used particularly for producing washing resistant care labels and are suitable for sewing in subsequently. They are supplied in two different qualities on a roll in various widths.

- ✓ roll length: 100 m / 200 m
- ✓ standard widths: 30, 35, 40 and 50 mm, others on demand
- ✓ PT 01: soft and smooth surface, suitable for printing on both sides, white
- ✓ PT 02: very firm, with a smooth surface, suitable for printing on both sides, white

Application area: ready-made clothing



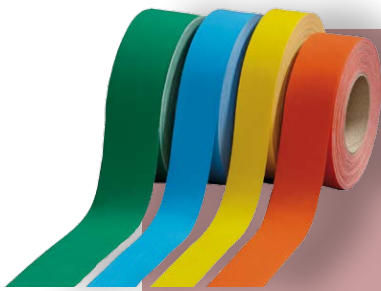

Coloured computer tape for belt marking (GB)

ThermoTex coloured computer tape for belt marking is especially suitable for marking lashing straps. The tape is very hard-wearing and robust. The labels are very UV-, weathering- and abrasion-resistant.



- ✓ roll length: 50 m
- ✓ very sharp printing quality and highly resistant print
- ✓ tape for sewing in
- ✓ standard widths: 20, 25, 30, 35, 40 and 50 mm, others on demand

Application area: ready-made clothing



Quality	Colour	Quality	Colour
GB2010	yellow	GB2015	pink
GB2011	blue	GB2016	pale green
GB2012	orange	GB2017	brown
GB2013	dark green	GB2018	rose
GB2014	red		



Computer marking tape for thermal transfer printers: CT2066

This marking tape is especially suitable for printing name tags for clothes or printing barcodes. The tape is supplied on a roll and is available in different widths.

- ✓ quality: CT2066
- ✓ material: for sewing / printable on both sides
- ✓ standard widths: 50 mm

Application area: ready-made clothing



Computer marking tape: CK2006-N-D

The computer marking tape is suitable for printing name tags and care labels or for the production of wash and cleaning-resistant labels. It is also suitable for sewing.

- ✓ available on rolls in different widths
- ✓ material: for sewing / printable on one side
- ✓ thinner material

Application area: ready-made clothing



CK2006-N

- ✓ thicker material

NT41P

- ✓ extremely abrasion resistant material
- ✓ suitable for sewing and heat seal



Please note: We also supply ready-made care labels for sewing!



Suitable supply combinations

for sewing				printer parameters*		
marking tape	ribbon ink black	ribbon ink coloured	washable**	type	blackening	speed
NT01, NT02, NT08, NT11	D-S-1-sw	D-S-1-ws	yes	TT3	23	50 mm/s
	D-S-2-sw	D-S-1-ro		TT4	3	75 mm/s
	T-S-1-sw	D-S-1-bl		BPPi	12	50 mm/s
	R-C-1-sw	D-S-1-gr				
	S-S-3-sw					
PT01, PT02	D-S-2-sw	D-S-1-ro	yes	TT3	23	50 mm/s
	S-S-3-sw	D-S-1-bl		TT4	1	125 mm/s
		D-S-1-gr		BPPi	12	50 mm/s
PT03		D-S-1-ws	yes			
PS08, PS09, PS10, PS11, PS12, PS15, PS16, PS17	A-S-1-sw	D-S-1-ws	yes	TT3	30	50 mm/s
	D-S-1-sw	D-S-1-ro		TT4	10	75 mm/s
	D-S-2-sw	D-S-1-bl				
	T-S-1-sw	D-S-1-gr				
CK2006-N-D, CT2066, CK2006-N	A-S-2-sw	D-S-1-ro	yes	TT3	26	50 mm/s
	D-S-2-sw	D-S-1-bl		TT4	5	75 mm/s
	T-S-1-sw	D-S-1-gr				
	R-C-1-sw					
GB2006, GB2010, GB2011, GB2012, GB2013, GB2014, GB2015, GB2016, GB2017	A-S-2-sw	D-S-1-ws	yes	TT3	26	50 mm/s
	D-S-2-sw	D-S-1-ro		TT4	5	75 mm/s
	T-S-1-sw	D-S-1-bl				
	R-C-1-sw	D-S-1-gr		TT3	26	50 mm/s
NT41P	D-S-1-sw			TT4	5	75 mm/s
	I-C-9-sw		yes	TT3	23	50 mm/s
	I-C-8-sw			TT4	3	75 mm/s

* Reference values, deviations possible

** The wash resistance should be tested further through your own washing procedures (see T & C ThermoTex, § 3-4)!

Suitable printer / supply combinations

	BPPi-1200 / TT3-L			TT3-SE			TT4-M			TT4-S			TT4-DL		
Ø max.	125 mm			200 mm			205 mm			205 mm			300 mm		
core Ø min.	25,4 mm			25,4 mm			38 mm			38 mm			38 mm		
width max.	118 mm			118 mm			116 mm			116 mm			110 mm		
roll length in meters	50	100	200	50	100	200	50	100	200	50	100	200	50	100	200
NT-tape, endless*	✓			✓			✓			✓			✓		
PS-tape, endless*				✓						✓			✓		
GB-tape, endless*				✓						✓			✓		
CK-tapes for sewing* (CK2006-N-D, CT2066, CK2006-N)				✓						✓			✓		

* Requirement: the printing system includes a cutting device

FY 030 GB #63592 V(1)

www.thermo-tex.de

ThermoTex Nagel GmbH | Schutterstraße 14
77746 Schutterwald | GERMANY
Phone +49 781 9616-0 | Fax +49 781 9616-50
info@thermo-tex.de | www.thermo-tex.de

ThermoTex Europe AG | Langenhagstrasse 13
4147 Aesch | SWITZERLAND
Phone +41 61 751 91 00 | Fax +41 61 751 91 01
info@thermo-tex.ch | www.thermo-tex.ch